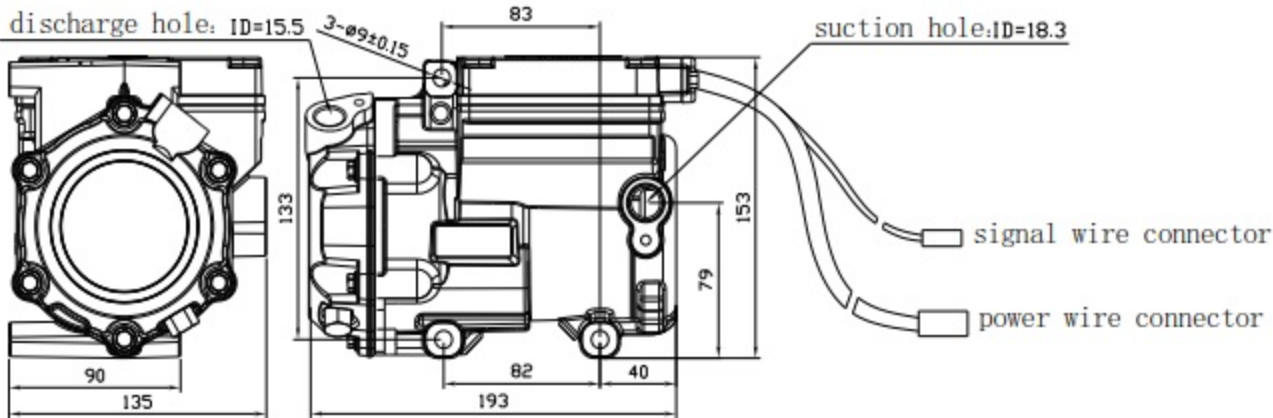


Series/Model MD24A6	Refrigerating capacity (KW) / (K Btu/hr)			Input power (KW)			Coefficient of performance (COP)			
	3,000 RPM	4,000 RPM	6,000 RPM	3,000 RPM	4,000 RPM	6,000 RPM	3,000 RPM	4,000 RPM	6,000 RPM	
	1.89 / 6.4	2.58 / 8.8	4.00 / 13.6	1.02	1.36	2.16	1.85	1.90	1.85	
	Displacement	Rated voltage	Rated current	Rotated speed range	Noise	Refrigerant		Net weight	External dimension	Voltage range range DC (V)
	(CC/REV)	DC (V)	(A) (6,000 RPM)	(RPM)	(dB) (A) (6,000 RPM)	R134a	R404a	(KG)	L x W x H	
	24	24V	90.0	1,500 - 6,000	75	○		5.8	193x135x153	20-31

Model MD24A6	Oil charge 100 cc	 discharge hole: ID=15.5 3-ø9±0.15 83 suction hole: ID=18.3 133 90 135 82 193 40 79 153 signal wire connector power wire connector
-----------------	----------------------	--